




# Solvent Red 119

Technical Data Sheet

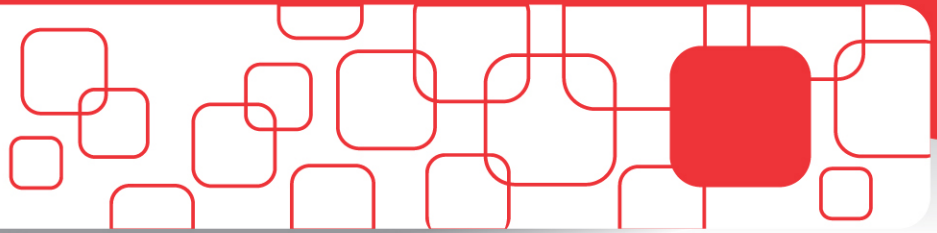

Product Name : **Solvent Red 119**

■ **PHYSIO - CHEMICAL PROPERTIES** (Rating 8 represents Highest fastness & 1 represents Lowest fastness)

Light Fastness	: 3 (Nitro Cellulose Printed Wet film 6 Micron)
	: 3 (Thermosetting Acrylic Printed Wet film 24 Micron)
Melting Point	: 115°C
Thermal Resistance	: 300°C
pH (1% Solution)	: 6 - 7
Bulk Density (Lit./Kg.)	: 2.5 - 3.0
Specific Gravity	: 1.8993

■ **SOLUBILITY** (Unit: Gm/lit (At Room Temp.); TR: Trace)

Methyl Ethyl Ketone (MEK)	: 100
Methyl ISO Butyl Ketone (MIBK)	: 75
Acetone	: 150
Ethyl Acetate	: 10
Diacetone Alcohol	: 50
Butyl Cellosolve	: 100
Ethyl Cellosolve	: 100
Ethanol	: 10
Methoxy Propanol	: 200
Toluene	: TR

■ **RESISTANCE TO CHEMICAL & FOOD STUFFS** (Rating 5 represents Highest Fastness & 1 represents Lowest Fastness)

Caustic Soda	: 5
Acetic Acid	: 4
Lactic Acid	: 5
Butter/Margarine	: 3
Paraffine Wax	: 5
Soap	: 3
Water (80 °C, 30 Min.)	: 5
Water (Boil, 30 Min.)	: 5
Coconut Oil	: 5
Cheese	: 4

■ **PRODUCT APPLICATIONS**

Suitable for Plastics, Printing Inks, Metallised Polyester Films, Aluminum Foil Coating, Stoving enamels, Leather Coating, Wood Finishes, Packaging Industry, etc.

■ **PACKING**

25 Kgs. Corrugated Boxes



**Camex**  
LIMITED

**Camex Limited**

Camex House, 2nd floor Stadium-Commerce Road, Navrangpura, Ahmedabad - 380 009, Gujarat, INDIA.

P : +91 79 6630 7300 | F : +91 79 6630 7342 | E : sales@camex.co.in