

## CWAX 110

**PE Wax**, also known as Polymer wax, short for Polyethylene Wax, is widely used because of its excellent property of cold / heat / chemical and abrasion resistance. In normal production, this part of wax can be directly added to the polyolefin processing as an additive; it can increase the gloss and processing performance.

### Properties:

Item	Standard Value(s)	Test Method
Physical Form	Waxy Flakes	Visual
Colour	White	Visual
CAS No.	9002 88 4	-
Melting Point, °C	112±3	ASTM D3418
Drop Point, °C	118±3	ASTM D127
Softening Point, °C	102±3	ASTM E28-97
Moisture Content	Less than 0.1%	-
Oil Content	Less than 0.2%	ASTM D721
Penetration 100 gms @ 25 °C	5±2 dmm	ASTM D1321-02a
Viscosity @ 140 °C	20±8 cP	ASTM D3236
Density, g/CC	0.90±0.2	ASTM C693
Hardness	Max 4	ASTM D1321-16a
Heat Stability @ 150 °C	No Change in Colour	Visual
Molecular Wt. (GPC)	1800±10%	LS-101/15
Acid Value	NIL	ASTM D1386-15
Flash Point	Open cup 220±5 °C	-
Odour	Passes	Visual

**Packing:** 25 KGs BOPP bag with Inner lining or according to customer's requirements


**Storage:** Keep in dry, cool & shaded place with original packing, avoid moisture, store at room temperature. Shelf life is 24 months.



**Government Recognised Export House**

Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email info@camexltd.com | Web :- www.camex ltd.com | CIN : L17100GJ1989PLC013041



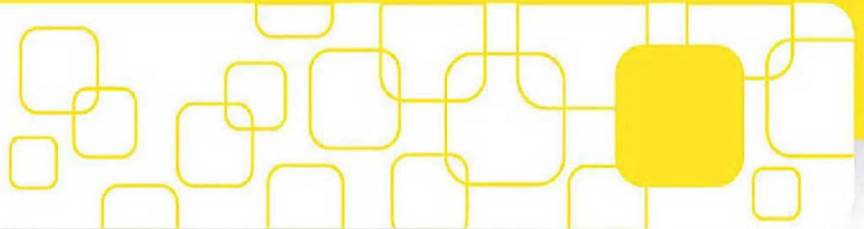

### **Application:**


1. PVC- Acts as a dispersant, lubricant & brightener in PVC Profile, pipe, pipe fitting, foam board, WPC products etc. It has a good late-period lubricating ability & will bring gloss in the appearance & lower processing torque.
2. Masterbatch- Used as an efficient dispersant in masterbatch, filler masterbatch, modified masterbatch & functional masterbatch. It makes the products inorganic components & pigments disperse better since it is an excellent external & internal lubricant.
3. PVC Stabilisers- In PVC processing, PE wax is used as both an internal and external lubricant. It aids in: Reducing viscosity, preventing adhesion to processing equipment, Enhancing the thermal stability of PVC formulations.
4. Release Agent- PE wax is used as a mold release agent in injection molding, extrusion, and other molding processes. It prevents the finished plastic parts from sticking to molds, which: Facilitates easier demolding & Reduces defects and damage to parts.
5. Modifier for Polyolefins- Adding PE wax to polyolefin resins (like polyethylene and polypropylene) can modify their properties, such as: Increasing hardness, enhancing abrasion resistance & Improving scratch resistance.
6. Hot Melt Adhesives- Used to better adjust the productivity, viscosity & hardness. Improves adhesive strength, enhances thermal stability & gives better resistance to heat and chemical exposure.
7. Paint- Used in paint, coating, road marking paint where its main performance is heat resistance, deforming, leveling, anti-settling & dispersion. It can increase the products surface hardness, wear resistance & anti-smearing properties.
8. Rubber- Used as rubber processing auxiliaries, enhances diffusion of fillers, improves extrusion rate, increases flowability of the mold, easy mold release, improves product surface brightness & smoothness after stripping off from the mold.
9. Surface Coatings and Inks- PE wax is incorporated into surface coatings and inks to: Improve abrasion resistance, enhance slip and anti-block properties as well as provide a matte finish.



#### **Government Recognised Export House**

Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email info@camexltd.com | Web :- www.camex ltd.com | CIN : L17100GJ1989PLC013041



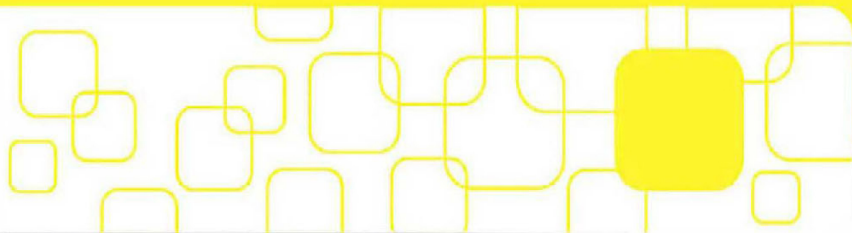

## CWAX 330

**PE Wax**, also known as Polymer wax, short for Polyethylene Wax, is widely used because of its excellent property of cold / heat / chemical and abrasion resistance. In normal production, this part of wax can be directly added to the polyolefin processing as an additive; it can increase the gloss and processing performance.

### Properties:

Item	Standard Value(s)	Test Method
Physical Form	Waxy Flakes	Visual
Colour	White	Visual
CAS No.	9002 88 4	-
Melting Point, °C	102±5	ASTM E28-97
Drop Point, °C	106±3	ASTM D127
Moisture Content	Less than 0.5%	-
Oil Content	Less than 1%	ASTM D721
Penetration 100 gms @ 25 °C	10±3 dmm	ASTM D1321-02a
Viscosity @ 140 °C	30±10 cP	ASTM D3236
Density, g/CC	0.90±0.2	ASTM C693
Heat Stability @ 150 °C	No Change in Colour	Visual
Molecular Wt. (GPC)	1800±20%	LS-101/15
Acid Value	NIL	ASTM D1386-15
Flash Point	Open cup 220±5 °C	-
Odour	Passes	Visual

**Packing:** 25 KGs BOPP bag with Inner lining or according to customer's requirements


**Storage:** Keep in dry, cool & shaded place with original packing, avoid moisture, store at room temperature. Shelf life is 24 months.



### Government Recognised Export House

Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email info@camexltd.com | Web :- www.camex ltd.com | CIN : L17100GJ1989PLC013041



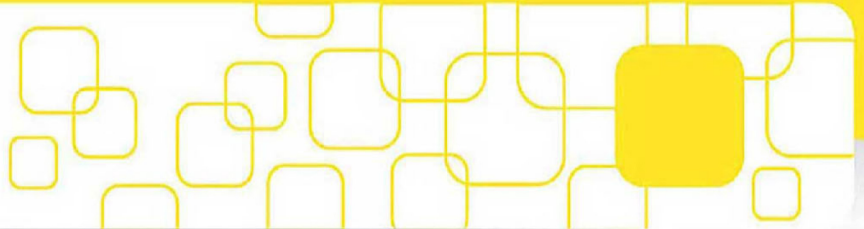

### **Application:**

1. PVC- Acts as a dispersant, lubricant & brightener in PVC Profile, pipe, pipe fitting, foam board, WPC products etc. It has a good late-period lubricating ability & will bring gloss in the appearance & lower processing torque.
2. Masterbatch- Used as an efficient dispersant in masterbatch, filler masterbatch, modified masterbatch & functional masterbatch. It makes the products inorganic components & pigments disperse better since it is an excellent external & internal lubricant.
3. PVC Stabilisers- In PVC processing, PE wax is used as both an internal and external lubricant. It aids in: Reducing viscosity, preventing adhesion to processing equipment, Enhancing the thermal stability of PVC formulations.
4. Release Agent- PE wax is used as a mold release agent in injection molding, extrusion, and other molding processes. It prevents the finished plastic parts from sticking to molds, which: Facilitates easier demolding & Reduces defects and damage to parts.
5. Modifier for Polyolefins- Adding PE wax to polyolefin resins (like polyethylene and polypropylene) can modify their properties, such as: Increasing hardness, enhancing abrasion resistance & Improving scratch resistance.
6. Hot Melt Adhesives- Used to better adjust the productivity, viscosity & hardness. Improves adhesive strength, enhances thermal stability & gives better resistance to heat and chemical exposure.
7. Paint- Used in paint, coating, road marking paint where its main performance is heat resistance, deforming, leveling, anti-settling & dispersion. It can increase the products surface hardness, wear resistance & anti-smearing properties.
8. Rubber- Used as rubber processing auxiliaries, enhances diffusion of fillers, improves extrusion rate, increases flowability of the mold, easy mold release, improves product surface brightness & smoothness after stripping off from the mold.
9. Surface Coatings and Inks- PE wax is incorporated into surface coatings and inks to: Improve abrasion resistance, enhance slip and anti-block properties as well as provide a matte finish.



#### **Government Recognised Export House**

Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email info@camexltd.com | Web :- www.camex ltd.com | CIN : L17100GJ1989PLC013041





## POLY ETHYLENE WAX

### C WAX

Technical Data Sheet

## CWAX 331

**PE Wax**, also known as Polymer wax, short for Polyethylene Wax, is widely used because of its excellent property of cold / heat / chemical and abrasion resistance. In normal production, this part of wax can be directly added to the polyolefin processing as an additive; it can increase the gloss and processing performance.

### Properties:

Item	Standard Value(s)	Test Method
Physical Form	Waxy Flakes	Visual
Colour	White	Visual
CAS No.	9002 88 4	-
Melting Point, °C	105±5	ASTM D3418
Drop Point, °C	110±5	ASTM D127
Softening Point, °C	100±5	ASTM E28-97
Moisture Content	Less than 0.1%	-
Oil Content	Less than 3%	ASTM D721
Penetration 100 gms @ 25 °C	10±3 dmm	ASTM D1321-02a
Viscosity @ 140 °C	12±5 cP	ASTM D3236
Density, g/CC	0.98±0.02	ASTM C693
Hardness	Max 4	ASTM D1321-16a
Heat Stability @ 150 °C	No Change in Colour	Visual
Molecular Wt. (GPC)	1500±10%	LS-101/15
Acid Value	NIL	ASTM D1386-15
Flash Point	Open cup 220±5 °C	-
Odour	Passes	Visual

**Packing:** 25 KGs HDPE bag with Inner lining or according to customer's requirements

**Storage:** Keep in dry, cool & shaded place with original packing, avoid moisture, store at room temperature. Shelf life is 24 months.



**CAMEX**  
LIMITED


A Govt. Recognised Export House

CAMEX HOUSE, 2nd Floor, Stadium-Commerce Road,  
Navrangpura, AHMEDABAD-380009. (INDIA)



Phone : 26462123 | 26462261 | 8980548181 | 8980548282


Web : www.camexltd.com | E-Mail : info@camexltd.com

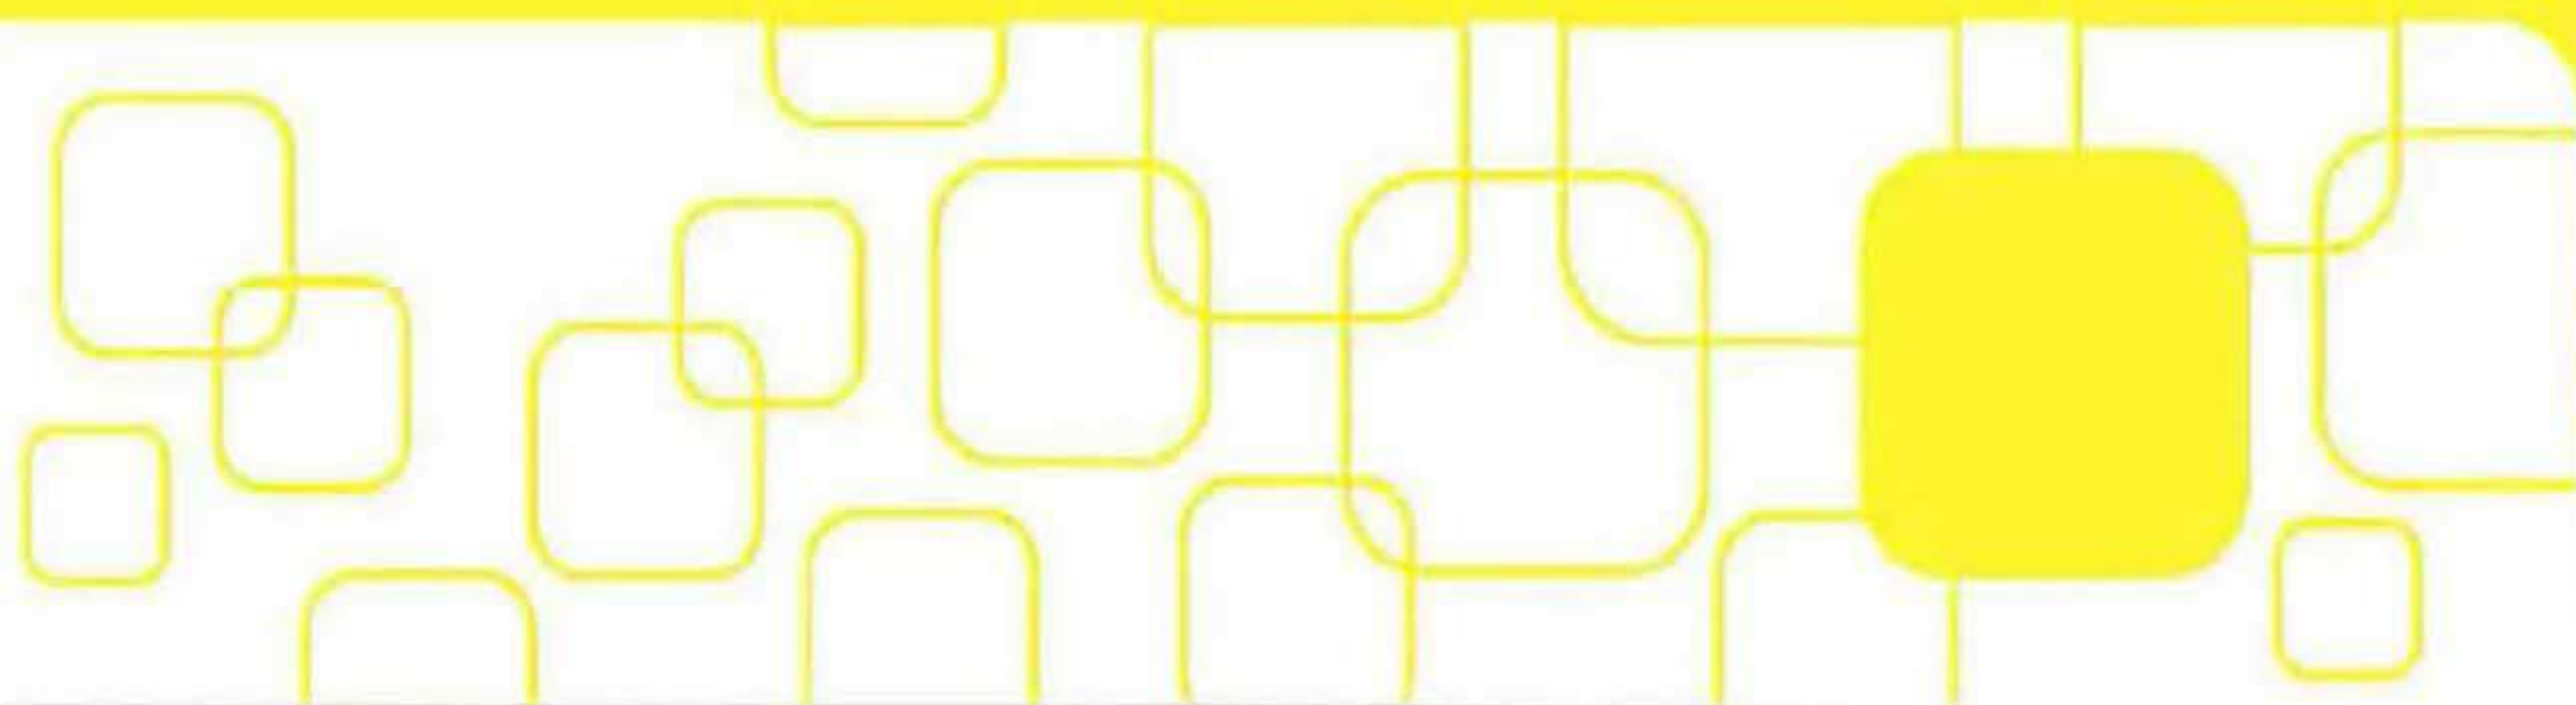

## Application:

1. PVC- Acts as a dispersant, lubricant & brightener in PVC Profile, pipe, pipe fitting, foam board, WPC products etc. It has a good late-period lubricating ability & will bring gloss in the appearance & lower processing torque.
2. Masterbatch- Used as an efficient dispersant in masterbatch, filler masterbatch, modified masterbatch & functional masterbatch. It makes the products inorganic components & pigments disperse better since it is an excellent external & internal lubricant.
3. PVC Stabilisers- Used as excellent external lubricant in PVC stabilizers, especially in Ca-Zn stabilizer.
4. Hot Melt Adhesives- Used to better adjust the productivity, viscosity & hardness. PE Wax improves its fluidity.
5. Paint- Used in paint, coating, road marking paint where its main performance is heat resistance, deforming, leveling, anti-settling & dispersion. It can increase the products surface hardness, wear resistance & anti-smearing properties.
6. Rubber- Used as rubber processing auxiliaries, enhances diffusion of fillers, improves extrusion rate, increases flowability of the mold, easy mold release, improves product surface brightness & smoothness after stripping off from the mold.
7. Cosmetics- Makes the product have a good gloss & 3-dimensional.



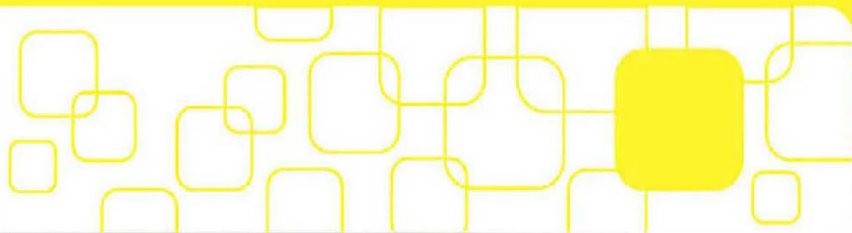

## CWAX 440

**PE Wax**, also known as Polymer wax, short for Polyethylene Wax, is widely used because of its excellent property of cold / heat / chemical and abrasion resistance. In normal production, this part of wax can be directly added to the polyolefin processing as an additive; it can increase the gloss and processing performance.

### Properties:

Item	Standard Value(s)	Test Method
Physical Form	Waxy Powder / Prill	Visual
Colour	White	Visual
CAS No.	9002 88 4	-
Melting Point, °C	110±5	ASTM D3418
Drop Point, °C	115±3	ASTM D127
Softening Point, °C	102±4	ASTM E28-97
Crystallization Point, °C	96±5	ASTM E794-06
Moisture Content	Less than 0.1%	-
Oil Content	Less than 0.2%	ASTM D721
Penetration 100 gms @ 25 °C	<10 dmm	ASTM D1321-02a
Viscosity @ 140 °C	20±10 cP	ASTM D3236
Density, g/CC	0.90±0.2	ASTM C693
Heat Stability @ 150 °C	No Change in Colour	Visual
Molecular Wt. (GPC)	1800±10%	LS-101/15
Acid Value	NIL	ASTM D1386-15
Peak Chain Length (SEC)	35 – 45 carbon atoms	-
Flash Point	Open cup 220±5 °C	-
Odour	Passes	Visual

**Packing:** 25 KGs BOPP bag with Inner lining or according to customer's requirements


**Storage:** Keep in dry, cool & shaded place with original packing, avoid moisture, store at room temperature. Shelf life is 24 months.



#### Government Recognised Export House

Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email info@camexltd.com | Web :- www.camex Ltd.com | CIN : L17100GJ1989PLC013041



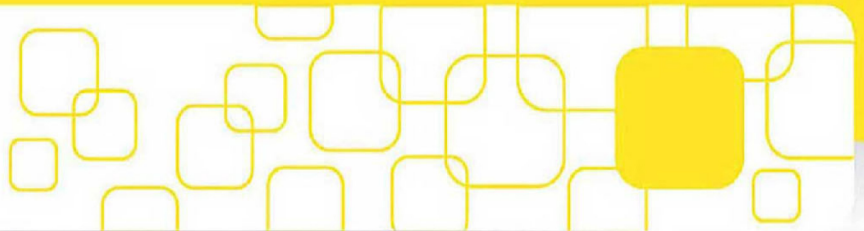

### **Application:**

1. PVC- Acts as a dispersant, lubricant & brightener in PVC Profile, pipe, pipe fitting, foam board, WPC products etc. It has a good late-period lubricating ability & will bring gloss in the appearance & lower processing torque.
2. Masterbatch- Used as an efficient dispersant in masterbatch, filler masterbatch, modified masterbatch & functional masterbatch. It makes the products inorganic components & pigments disperse better since it is an excellent external & internal lubricant.
3. PVC Stabilisers- In PVC processing, PE wax is used as both an internal and external lubricant. It aids in: Reducing viscosity, preventing adhesion to processing equipment, Enhancing the thermal stability of PVC formulations.
4. Release Agent- PE wax is used as a mold release agent in injection molding, extrusion, and other molding processes. It prevents the finished plastic parts from sticking to molds, which: Facilitates easier demolding & Reduces defects and damage to parts.
5. Modifier for Polyolefins- Adding PE wax to polyolefin resins (like polyethylene and polypropylene) can modify their properties, such as: Increasing hardness, enhancing abrasion resistance & Improving scratch resistance.
6. Hot Melt Adhesives- Used to better adjust the productivity, viscosity & hardness. Improves adhesive strength, enhances thermal stability & gives better resistance to heat and chemical exposure.
7. Paint- Used in paint, coating, road marking paint where its main performance is heat resistance, deforming, leveling, anti-settling & dispersion. It can increase the products surface hardness, wear resistance & anti-smearing properties.
8. Rubber- Used as rubber processing auxiliaries, enhances diffusion of fillers, improves extrusion rate, increases flowability of the mold, easy mold release, improves product surface brightness & smoothness after stripping off from the mold.
9. Surface Coatings and Inks- PE wax is incorporated into surface coatings and inks to: Improve abrasion resistance, enhance slip and anti-block properties as well as provide a matte finish.



#### **Government Recognised Export House**

Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email [info@camexltd.com](mailto:info@camexltd.com) | Web :- [www.camexltd.com](http://www.camexltd.com) | CIN : L17100GJ1989PLC013041

