

PVC STABILIZER : GRADE : CZ-B30



ABOUT PRODUCT

CZ-3B30 is high performance Calcium -Zinc stabilizer for u-PVC pipes. It guarantees a good processing, good static & Dynamic Heat stability.

ADVANTAGE :

- Can achieve highest rated throughput of machine.
- Excellent Heat Stabilizing effect comparing lead Base Stabilizer.
- Ease of extrusion process by balanced Internal and External Lubrication
- Better surface finish, Superior gloss, antioxidant & Heat stability during shelf life of pipe
- Consistent physical properties such as impact strength, mechanical strength and pressure test.

APPLICATION :

- Plumbing Conduits Pipes Agricultural, Casing, Pressure, SWR Pipe.

APPEARANCE	White Powder
MOISTURE CONTENT	1.50%max
SPECIFIC GRAVITY	1.20 - 1.40

RECOMMENDED DOSAGE :

This is depending on the type of product, dry blend composition used machinery and processing conditions. However, 2.0 to 3.5 PHR recommended. We recommend a minimum mixing temperature of 110 to 120°C for an optimal dispersion on the PVC grain.



APPLICATIONS

Plumbing Conduits Pipes,
Agricultural,
Casing, Pressure, SWR Pipe.



PACKING AND SAFETY

25 Kgs HDPE bag
Use PPE's like Nose mask, Hand
gloves safety goggles




CONTACT US

+91 98980 11010
sales@camex.co.in
www.camexltd.com

NOTE : This information and our technical advice-whether verbal, in writing or by way of trails are given in good faith but without warranty and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our controls and, therefore, entirely your own responsibility. Our product are sold in accordance with the current version of our General conditions of Sales and delivery

PVC STABILIZER : GRADE : CZ-309

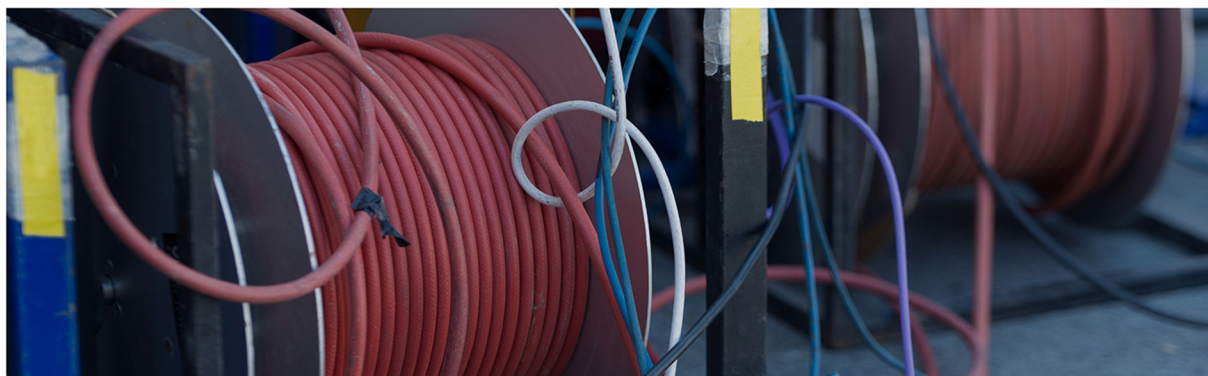

ABOUT PRODUCT

CZ 309 is Calcium - Zinc stabilizer for PVC cable compounds insulation and sheathing both. It gives very good initial color and high heat stability. It can also be used for various flexible applications.

HANDLING INSTRUCTIONS

CZ 309 is a non-toxic product however, proper care should be taken while handling. It is highly recommended to use face mask and hand gloves and avoid unnecessary personal contact.



APPLICATIONS

90 Deg - PVC wire and cable compounds for insulation
Flexible PVC profiles



PACKING & SAFETY

Shelf life is 06 months from the date of manufacturing.
Dosage should be 6 - 12 PHR.

Properties	Physical Form	Powder	DISCLAIMER : <small>Any product information, recommendations or other information published in this document ("Information") is given to the best of Camex Ltd. knowledge. All this information shall not, however, as far as legally permissible, (i) create or be deemed as any guarantee, representation or warranty of any kind or (ii) create any liability of Ra Chemicals. In any event this Information shall not relieve the customer or any third party from undertaking its own investigations and tests. Therefore, Camex Ltd., as far as legally permissible, expressly excludes and disclaims any liability associated with the use of any information by a customer or by any other third party</small>
	Color	White	
	Moisture	< 0.5%	
	Specific Gravity	1.62 ± 0.05	